

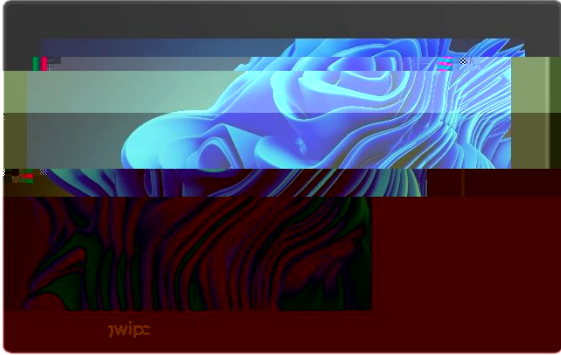






IVS-185

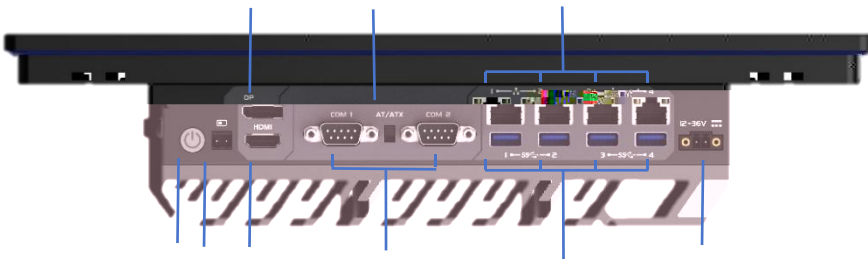

- 18.5
1920 1080
- / 10
- / /
- / / 390
- 2
- 2 232/422/485
- 12-36 / /
- /

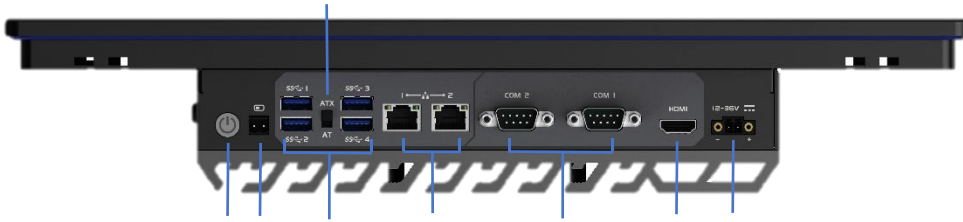


IVS-185

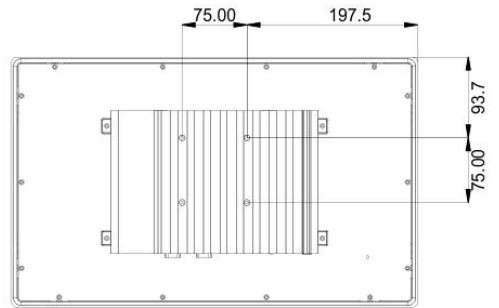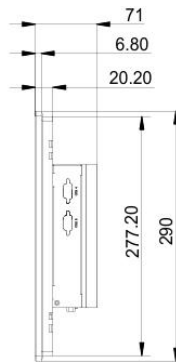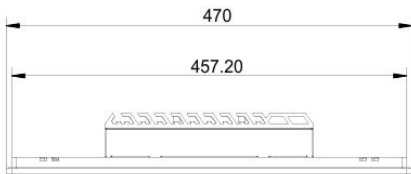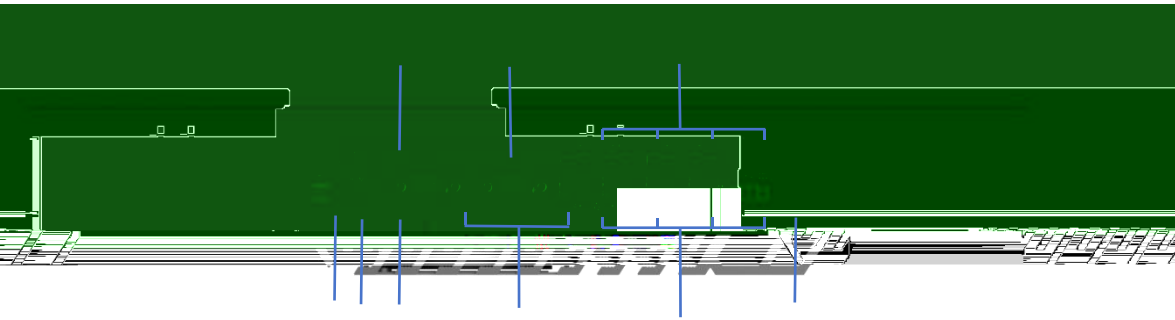


Actual Dimensions : $450^{+1.5}_{-0}$ x $270^{+1.5}_{-0}$ mm

IVS-185

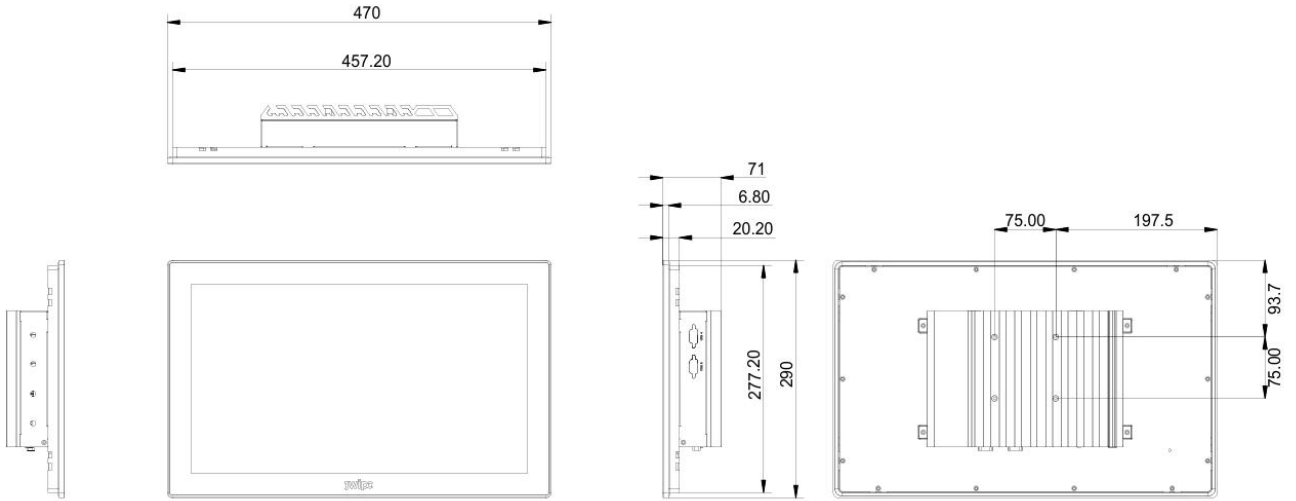

允許尺寸公差: $450^{+1.5}_{-0}$ \times $270^{+1.5}_{-0}$ mm

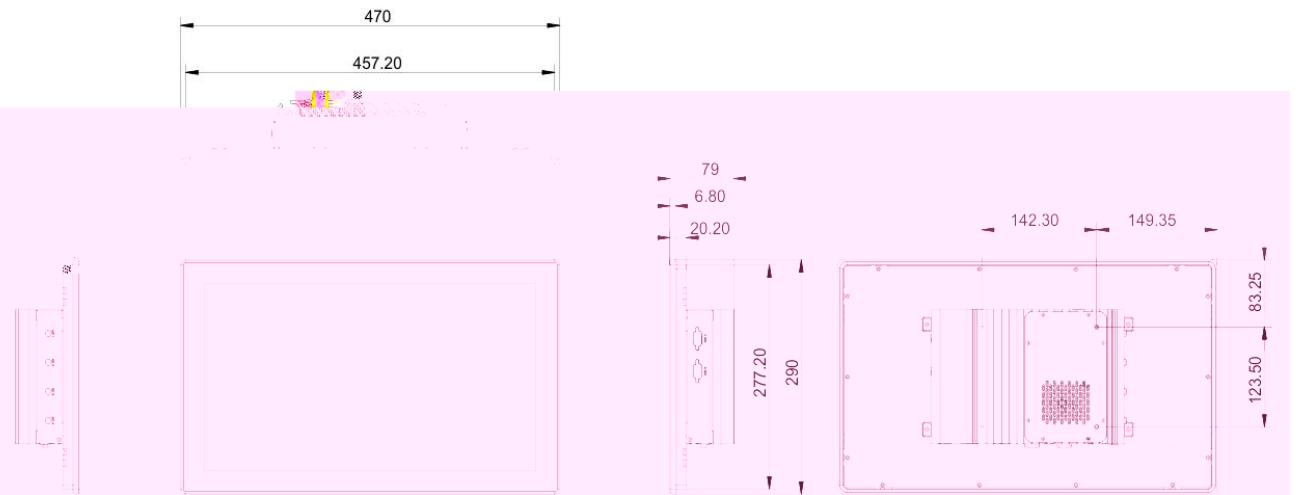

允許尺寸公差: $450^{+1.5}_{-0}$ \times $270^{+1.5}_{-0}$ mm

S	CPU	2.0	.10	6412 4	3-1215 /15-1235 /17-1255 .15	5-12450 / 7-12650 .25	3-1315 /15-1335 /17-1355 .15	5-13420 / 7-13620 .25	390	6/8/9 7/5/3 1151 .65
		1	-	4-3200,	1	-	5-5200	1	-	4-3200, 16
		1	.2	2242/2280	1	.2	2242/2280	1	7+15	3.0
		1	7+15	3.0	1	7+15	3.0			
		1	210	,1	226-	3	226-	1	210	4
	I/O	2	232/422/485	2	232					
		4	3.0							
	1				1	1.4	1	1.2		
	1	.2	2230		6	1	.2	3052/3042		
		4	/5							
LCD		16:9								
		1920	1080							
		250	/	2						
		1000:1								
		30000								
		89 ()	, 89 ()	, 89 ()	, 89 ()					
	10									
	81%	(80%)							
	5000		1000							
	12-36	,	/	/	/					
	470	290	71	(79)				
		7		10,		11,				
	OP	0	50	(32	122)				
		95%	40	(-)				
	NOP	-20	60	(-4	140)				
	OP	15	11							
	OP	5	500	1						
	EMC									
	IP	65								

						LAN	USB	COM
-185 3 -			1920 10	8	256	2	4	2
-8 -	6412		80					
-185 5 -	3		1920 10	8	256	4	4	2
3-8 -	1215		80					
-185 5 -	5		1920 10	8	256	4	4	2
5-8 -	1235		80					
-185 5 -	7		1920 10	8	256	4	4	2
7-8 -	1255		80					
-185 5 -	5		1920 10	8	256	4	4	2
5-8 -	12450		80					
-185 5 -	7		1920 10	8	256	4	4	2
7-8 -	12650		80					
-185 5 -	3		1920 10	8	256	4	4	2
3-8 -	1315		80					
-185 5 -	5		1920 10	8	256	4	4	2
5-8 -	1335		80					
-185 5 -	7		1920 10	8	256	4	4	2
7-8 -	1355		80					
-185 5 -	5		1920 10	8	256	4	4	2
5-8 -	13420		80					
300600023925 , 06519034-6 ,65 ,100-240 ,19 ,3.42 , ,0 +40 , ,								
300600016156 , -90 19,90 , 100 240 ,19 ,4.74 , , / / ,0 40 , ,								
300600023479 , 15019079-6 ,150 ,100 240 ,18.05 19.95 ,7.9 ,2 , ,0 40 , ,								
301800000605 , , - =1.5 , - 31 -2 5, 300/500 ,3 0.75 2, , , ,								
301700021856 I/O ,JL396-39602G01, ,2Pin,3.96mm,Copper Alloy,90 , ,NA,NA, ,ASS,JinLing								
302700002073 , ()								

DDR4	-	16				
DDR5	-	32				
SSD	.2	128	,256	,512	,1	,2
HDD	2.5	128	,256	,512	,1	,2
4G/5GModule	4	/5				
WiFi & Bluetooth Module		&				
COM	2	232				
POE	-4	, 0.1				
		,75	100			
I/O		,2Pin,3.81mm				
		, 180	, ,		, 304, =3.0,24	21.7 23